


PRODUCT FEATURES

- Prevents product sheer (between rotor tip and housing)
- Constructed of 304 stainless or carbon steel

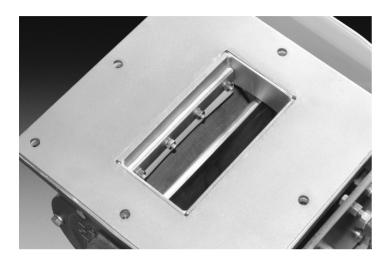

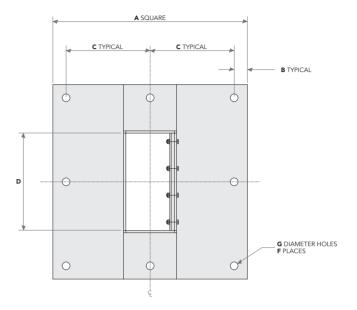



Non-Adjustable Flow Pellet Valve Dimensions (inches)							
ROTARY VALVE FEEDER SIZE	A	В	с	D	E	F	G
FT7	11	3/4	4-3/4	5-1/2	2-3/4	8	7/16
FT9	12	3/4	5-1/4	7-1/4	3-3/4	8	7/16
FT11	13	3/4	5-3/4	8	4-3/4	8	7/16
FT12	15	1	6-1/2	9	4-3/4	8	7/16
FT14	17	5/8	5-1/4	11	5-3/4	12	7/16
FT16	18	3/4	5-1/2	11-3/4	7-3/4	12	7/16
FT18	20	1	6	13-3/4	8-3/4	12	7/16
FT22	22	1	5	14-3/4	9-3/4	16	7/16
FT30	31	1-1/2	7	20-1/2	14	16	9/16

 SAFETY NOTICE
 Design Engineers • Technicians • Installers
 SAFETY NOTICE

 The inlet and outlet of the rotary valve must have proper attachments to prevent anyone from being able to insert their hands, or foreign objects, into the valve when in operation.
 Prevent anyone from being able to insert their hands, or foreign objects, into the valve when in operation.

